




Exterior Stucco

BMI Natural Base

BMI White Base

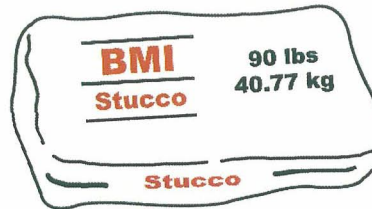

Product Description:

BMI Natural Base and BMI White Base are cement based products for a permanent decorative finish over exterior surfaces. Material is factory prepared using raw ingredients that meet or exceed ASTM specifications. BMI exterior stucco is prepared in natural base, white base and in any **standard color chart** or can be **custom color matched** upon request. Texture available in **Float 16/20, Texture 20/30, Marble, Dash, 20 mesh, 30 mesh**, or upon job specification.

Product Procedures:

Preparation:

The brown coat shall be a uniform properly prepared Portland cement based substrate. The brown coat should be moist cured for at least 48 hours and allowed to dry completely for a minimum of 7 days.

Mixing:

Exterior stucco finish shall be power mixed with clean water for at least 15 minutes to assure complete hydration. Do not attempt to temper material that has started to set. Under most conditions, a batch will not start to set up for 90 minutes.

Application:

Finishes shall be 1/16" to 1/8" thick.

Manufacturer:

BMI Products of Northern California, Inc.

990 Ames Avenue

Milpitas, CA 95035-6303

Phone: (408) 293-4008

Fax: (408) 293-4103

Web Site: www.bmi-products.com

Cont'd Product Procedures:

Hand application: Apply using trowel. Spread on even coat then rubber float (sand finish) or trowel to desired texture.

Gun Application: Spray first coat over dry surface and cover base coat completely. After first coat has dried, spray second coat in thinner consistency and bring to the desired texture. During periods of hot and dry weather, lightly mist with clean water. BMI exterior stucco finish will normally dry and set the same day. Final hardness will be reached in 28 days.

Do not apply with temperature below 40 degrees F.

Coverage:

Coverage's are affected by method of application, existing surface conditions and the texture desired. Approximate coverage's per 90 lb bag are:

Sand/Float finish	12-16 sq yds
Lace/Texture finish	10-14 sq yds
Machine/Dash finish	8-12 sq yds
Smooth/Marble finish	14-18 sq yds

Specifications:

Material Standards

- Hydrated Type-S Lime: ASTM C-206
- White Portland Cement: ASTM C-150 Type I
- BMI Exterior Stucco Finish: Conforms to ASTM C-926 Recommendations

